


2SH

2FH

continued on next page




- Twinwheel
- Top plate fixing
- Kingpinless swivel head design




2SH + NYLON WHEEL



2SH (swivel)

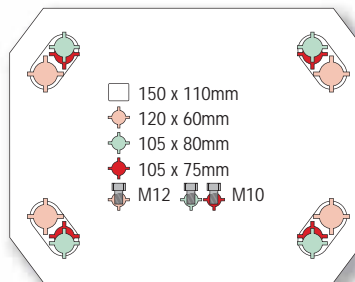

2FH (fixed)

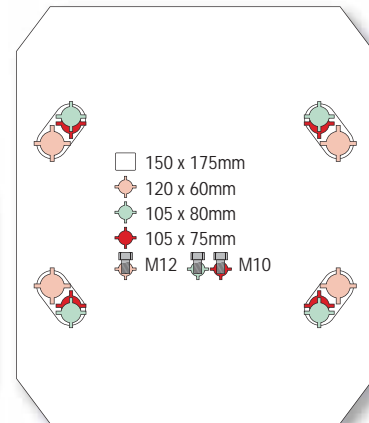

wheel diameter	tread width	fitted height	swivel offset	load capacity	bearing type	bearing type		bearing type	
						swivel	fixed	swivel + thumbscrew wheel brake * **	swivel + 4 way directional lock **
150	50 x 2	202	65	1360	ball	2SH 150 NY2H	2FH 150 NY2H	2SH 150 NY2H W	2SH 150 NY2H D
200	50 x 2	252	70	1500	ball	2SH 200 NY2H	2FH 200 NY2H	2SH 200 NY2H W	2SH 200 NY2H D

* Thumbscrew fitted to each side of twinwheel swivel castors.

** Thumbscrew adaptation is available fitted to castors with directional lock. To order add W to castor reference.

NOTE: All dimensions are in mm and all loadings in kg unless otherwise stated