

- Twinwheel
- Top plate fixing
- Kingpinless swivel head design


2SH
2FH

continued on next page


2SH + POLYURETHANE TYRED WHEEL WITH CAST IRON CENTRE



2SH (swivel)

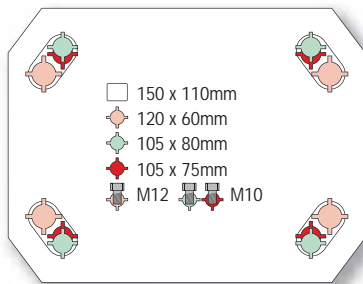

2FH (fixed)

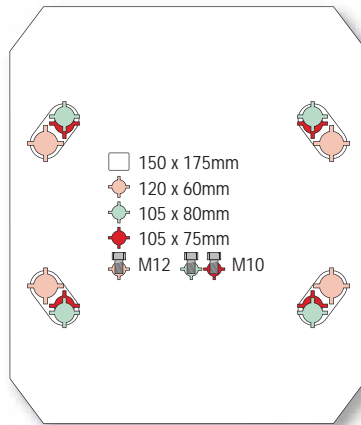

wheel diameter	tread width	fitted height	swivel offset	load capacity	bearing type	swivel	fixed	swivel + thumbscrew wheel brake ***	swivel + 4 way directional lock **
						2SH 125 PT2H	2FH 125 PT2H	2SH 125 PT2H W	2SH 125 PT2H D
125	38 x 2	177	63	720	ball	2SH 125 PT2H	2FH 125 PT2H	2SH 125 PT2H W	2SH 125 PT2H D
150	38 x 2	202	65	1240	ball	2SH 150 PT2H	2FH 150 PT2H	2SH 150 PT2H W	2SH 150 PT2H D
200	45 x 2	252	70	1500	ball	2SH 200 PT2H	2FH 200 PT2H	2SH 200 PT2H W	2SH 200 PT2H D

* Thumbscrew fitted to each side of twinwheel swivel castors.

** Thumbscrew adaptation is available fitted to castors with directional lock. To order add W to castor reference.

NOTE: All dimensions are in mm and all loadings in kg unless otherwise stated