


- Twinwheel
- Top plate fixing
- Double ball race swivel head
- Kingpinless swivel head design

2SZ

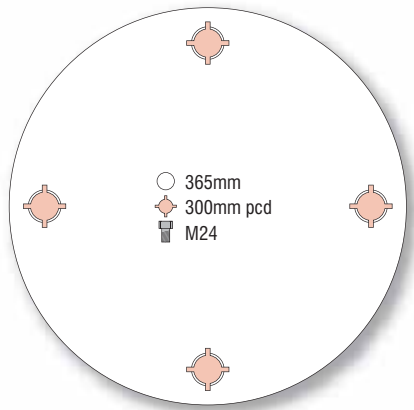

2SZ + CAST NYLON WHEEL (not illustrated)

wheel diameter	tread width	fitted height	swivel offset	load capacity	bearing type	swivel		
						swivel	fixed	swivel + 8 way directional lock
400	125 x 2	570	150	20000	taper roller	2SZ 400 CN3 125	2FZ 400 CN3 125	2SZ 400 CN3 125 D

2SZ + POLYURETHANE TYRED WHEEL WITH CAST IRON CENTRE

wheel diameter	tread width	fitted height	swivel offset	load capacity	bearing type	swivel		
						swivel	fixed	swivel + 8 way directional lock
400	125 x 2	570	150	11400	taper roller	2SZ 400 PT3Z	2FZ 400 PT3Z	2SZ 400 PT3Z D

NOTE: All dimensions are in mm and all loadings in kg unless otherwise stated