


2VSH | NY | PLATE FIXING


NYLON WHEELS

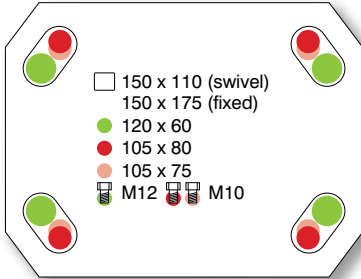

	wheel diameter	tread width	fitted height	swivel offset	load capacity	bearing type	swivel	fixed	swivel + total-stop brake
P	100	40 x 2	166	42	400	ball	2VSH 100 NYJHD P06	2VFH 100 NYJHD P06	
P	125	45 x 2	192	45	550	ball	2VSH 125 NYJHD P06	2VFH 125 NYJHD P06	
P	150	50 x 2	217	49	1050	ball	2VSH 150 NYJHD P06	2VFH 150 NYJHD P06	
P	200	50 x 2	267	54	1400	ball	2VSH 200 NYJHD P06	2VFH 200 NYJHD P06	
P	250	50 x 2	318	70	1800	ball	2VSH 250 NYJHD P06	2VFH 250 NYJHD P06	

2VSH | NP | PLATE FIXING

GREY POLYURETHANE TYRED WHEELS WITH NYLON CENTRE

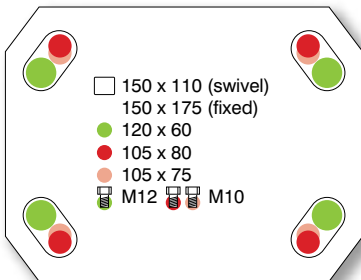

	wheel diameter	tread width	fitted height	swivel offset	load capacity	bearing type	swivel	fixed	swivel + total-stop brake
P	100	40 x 2	166	42	400	ball	2VSH 100 NPJ P06	2VFH 100 NPJ P06	
P	125	45 x 2	192	45	550	ball	2VSH 125 NPJ P06	2VFH 125 NPJ P06	
P	150	50 x 2	217	49	650	ball	2VSH 150 NPJ P06	2VFH 150 NPJ P06	
P	200	57 x 2	267	54	1050	ball	2VSH 200 NPJ P06	2VFH 200 NPJ P06	



4-WAY DIRECTIONAL LOCK for straight line travel

Supplied separately, order ref VSHDLKIT

P Preferred range product, see page 1 for details

i All dimensions are in **mm** and all loadings are in **kg** unless otherwise stated