


- Single ball race
- Top plate fixing




61 + CAST IRON WHEEL




50mm swivel




50mm fixed




100mm swivel




100, 125mm fixed




63mm swivel




63mm fixed




125, 150mm swivel

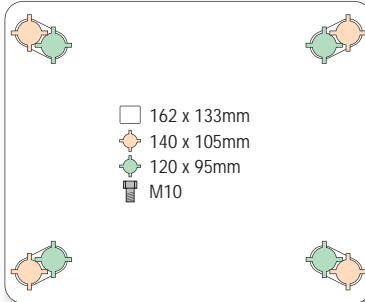


150mm fixed

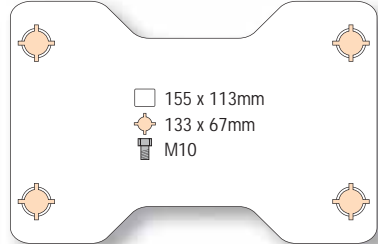

75mm swivel




75mm fixed




wheel diameter	tread width	fitted height	swivel offset	load capacity	bearing type	swivel	fixed	swivel + wheel brake
50	22	64	17	54	plain	9 61 CI *	9 88 CI *	
63	25	81	22.5	122	plain	2 61 CI *	2 88 CI *	
75	32	95	24.5	170	plain	3 61 CI	3 88 CI	
100	38	125	26	340	roller	4 61 CIB	4 88 CIB	
125	41	156	35.5	475	roller	5 61 CIB	5 88 CIB	
150	45	181	42	680	roller	6 61 CIB	61 88 CIB	


* 50, 63mm wheels are manufactured in self-coloured Mazac zinc based alloy



THREADED STEM to suit 63, 75mm swivel castors
Add ST to castor reference



- 140 x 140mm
- ◇ 73-102 x 73-102mm
- ⊕ M8



- 150 x 150mm
- ◇ 96-114 x 96-114mm
- ⊕ M10

TRIANGULAR TOP PLATE to suit 63, 75, 100mm swivel castors
Add V to castor reference

NOTE: All dimensions are in mm and all loadings in kg unless otherwise stated