


- Single ball race
- Top plate fixing




61 + NYLON WHEEL




50mm swivel




50mm fixed




100mm swivel




100, 125mm fixed




63mm swivel




63mm fixed




125, 150mm swivel

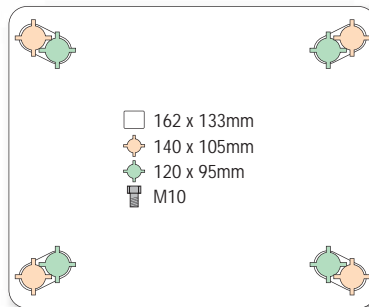


150mm fixed

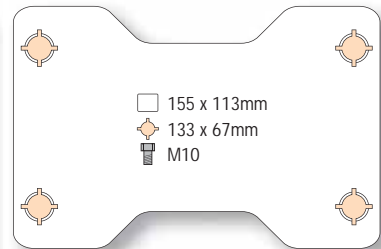


75mm swivel




75mm fixed




wheel diameter	tread width	fitted height	swivel offset	load capacity	bearing type			
						swivel	fixed	swivel + wheel brake
50	19	64	17	54	plain	9 61 NY	9 88 NY	
63	22	81	22.5	122	plain	2 61 NY	2 88 NY	
75	25	95	24.5	170	plain	3 61 NY	3 88 NY	3 61 NY BR
100	32	125	26	270	plain	4 61 NY	4 88 NY	4 61 NY BR
125	35	156	35.5	365	roller	5 61 NYB	5 88 NYB	
150	38	181	42	520	roller	6 61 NYB	61 88 NYB	



THREADED STEM to suit 63, 75mm swivel castors
Add ST to castor reference



- 140 x 140mm
- ◇ 73-102 x 73-102mm
- ⊕ M8



- 150 x 150mm
- ◇ 96-114 x 96-114mm
- ⊕ M10

TRIANGULAR TOP PLATE to suit 63, 75, 100mm swivel castors
Add V to castor reference

NOTE: All dimensions are in mm and all loadings in kg unless otherwise stated