


- Single ball race
- Top plate fixing


61 + BLUE RUBBER TYRED WHEEL WITH NYLON CENTRE




50mm swivel




50mm fixed




100mm swivel

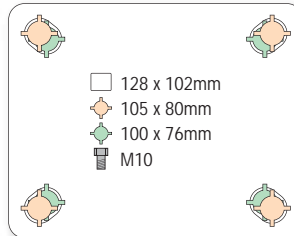


100, 125mm fixed

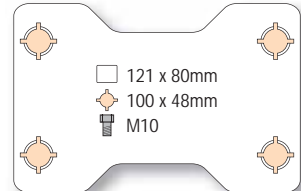


63mm swivel




63mm fixed




125, 150mm swivel

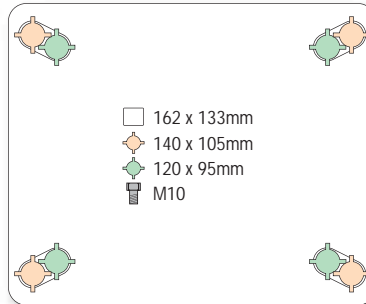


150mm fixed

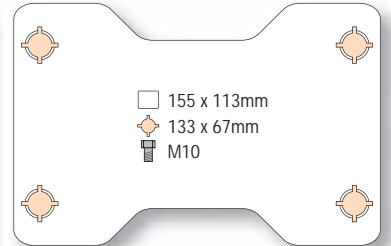


75mm swivel




75mm fixed

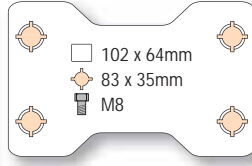


wheel diameter	tread width	fitted height	swivel offset	load capacity	bearing type	bearing type		
						swivel	fixed	swivel + wheel brake
50	22	64	17	27	plain	9 61 RN	9 88 RN	
63	25	81	22.5	60	plain	2 61 RN	2 88 RN	
75	32	95	24.5	90	plain	3 61 RN	3 88 RN	3 61 RN BR
100	38	125	26	160	plain	4 61 RN	4 88 RN	4 61 RN BR
125	38	156	35.5	180	roller	5 61 RNB	5 88 RNB	
150	45	181	42	300	roller	6 61 RNB	61 88 RNB	



THREADED STEM to suit 63, 75mm swivel castors
Add ST to castor reference



- 140 x 140mm
- ◇ 73-102 x 73-102mm
- ⊕ M8



- 150 x 150mm
- ◇ 96-114 x 96-114mm
- ⊕ M10

TRIANGULAR TOP PLATE to suit 63, 75, 100mm swivel castors
Add V to castor reference

NOTE: All dimensions are in mm and all loadings in kg unless otherwise stated