


VSL | EAP | PLATE FIXING

'ERGONOMIC' CROWN TREAD POLYURETHANE TYRED WHEEL WITH ALUMINIUM CENTRE



	wheel diameter	tread width	fitted height	swivel offset	load capacity	bearing type	swivel	fixed	swivel + total-stop brake
P	100	50	135	20	300	ball	VSL 100 EAPJ P05	VSLF 100 EAPJ P05	VSL 100 EAPJ P05 SWB
P	125	50	159	30	350	ball	VSL 125 EAPJ P05	VSLF 125 EAPJ P05	VSL 125 EAPJ P05 SWB
P	150	50	189	39	450	ball	VSL 150 EAPJ P05	VSLF 150 EAPJ P05	VSL 150 EAPJ P05 SWB
P	200	50	238	39.5	520	ball	VSL 200 EAPJ P05	VSLF 200 EAPJ P05	VSL 200 EAPJ P05 SWB



WHEEL BRAKE
Swivel castors only

Simple side-mounted, foot operated brake acts upon the wheel only

Add **BK** to castor reference



4-WAY DIRECTIONAL LOCK for straight line travel

To suit all swivel castors except with total-stop brake


Add **DL** to castor reference

P Preferred range product, see page 1 for details

i All dimensions are in **mm** and all loadings are in **kg** unless otherwise stated

VSH | EAP | PLATE FIXING

'ERGONOMIC' CROWN TREAD POLYURETHANE TYRED WHEEL WITH ALUMINIUM CENTRE

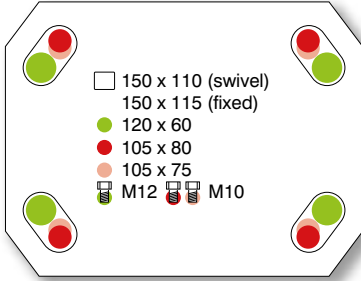

	wheel diameter	tread width	fitted height	swivel offset	load capacity	bearing type	swivel	fixed	swivel + total-stop brake
P	100	50	152	34	300	ball	VSH 100 EAPJ P06	VFH 100 EAPJ P06	VSH 100 EAPJ P06 SWB
P	125	50	177	45	350	ball	VSH 125 EAPJ P06	VFH 125 EAPJ P06	VSH 125 EAPJ P06 SWB
P	150	50	202	49	450	ball	VSH 150 EAPJ P06	VFH 150 EAPJ P06	VSH 150 EAPJ P06 SWB
P	200	50	252	54	520	ball	VSH 200 EAPJ P06	VFH 200 EAPJ P06	VSH 200 EAPJ P06 SWB



4-WAY DIRECTIONAL LOCK for straight line travel

To suit all swivel castors except with total-stop brake

Supplied separately, order ref **VSHDLKIT**

P Preferred range product, see page 1 for details

i All dimensions are in **mm** and all loadings are in **kg** unless otherwise stated

	wheel diameter	tread width	hub width	bore diameter	load capacity	used in castor series	ball bearing
P	100	50	60	17	300	VSL VSH	G 100 EAPJ 17
P	125	50	60	17	350	VSL VSH	G 125 EAPJ 17
P	150	50	60	17	450	VSL VSH	G 150 EAPJ 17
P	200	50	60	17	520	VSL VSH	G 200 EAPJ 17



P Preferred range product, see page 1 for details

i All dimensions are in **mm** and all loadings are in **kg** unless otherwise stated