


- Anti-static / conductive / ESD. Resistivity < 10kΩ
- Contemporary design
- Corrosion resistant polyamide construction
- Plate, bolt hole or bolt fixing
- Precision ball bearing in swivel head
- Labyrinth seal for protection in wet conditions


TANGO + ANTI-STATIC THERMOELASTIC RUBBER TYRED WHEEL WITH POLYPROPYLENE CENTRE – THREAD FIXING



i Total stop castors: yellow pedal
Directional lock castors: dark grey pedal

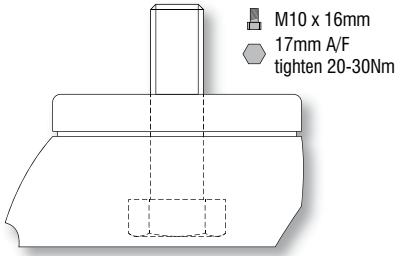

wheel diameter	tread width	fitted height	swivel offset	shore A	load capacity	bearing type	swivel	fixed	swivel + total stop brake	swivel + directional lock
75	32	110	35.5	86	70	ball	MKR-S-75 PTE/K AX		MKR-JY-S-75 PTE/K AX	MKR-R-S-75 PTE/K AX
100	32	141	45	86	100	ball	GKR-S-100 PTE/K AX		GKR-JY-S-100 PTE/K AX	GKR-R-S-100 PTE/K AX
125	32	161	44.5	86	100	ball	GKR-S-125 PTE/K AX		GKR-JY-S-125 PTE/K AX	GKR-R-S-125 PTE/K AX

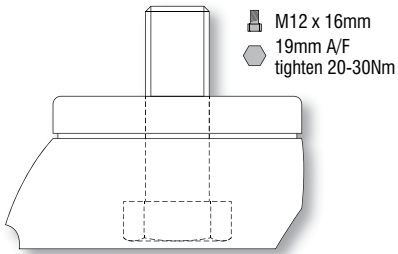

◀ ALTERNATIVE BOLT SIZE. M12 x 16mm, 19mm A/F.
Only available on swivel castors.
Add **M12** to castor reference.

i All dimensions are in mm and all loadings in kg unless otherwise stated