



GKR | PTE | BOLT FIXING

GREY THERMOELASTIC RUBBER TYRED WHEEL WITH POLYPROPYLENE CENTRE

i Total stop castors: red pedal
Directional lock castors: dark grey pedal

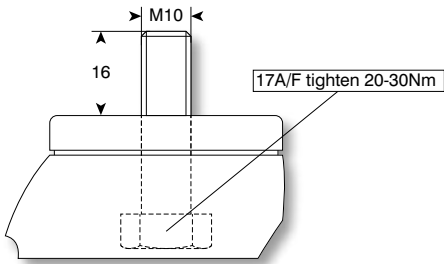

wheel diameter	tread width	fitted height	swivel offset	shore A	load capacity	bearing type	swivel	fixed	swivel + total-stop brake	swivel + directional lock
75	32	110	35.5	80	70	ball	GKR-S-75 PTE/K 80-G2		GKR-J-S-75 PTE/K 80-G2	GKR-R-S-75 PTE/K 80-G2
100	32	141	45	80	100	ball	GKR-S-100 PTE/K 80	GPR-S-100 PTE/K 80	GKR-J-S-100 PTE/K 80	GKR-R-S-100 PTE/K 80
125	32	161	44.5	80	100	ball	GKR-S-125 PTE/K 80	GPR-S-125 PTE/K 80	GKR-J-S-125 PTE/K 80	GKR-R-S-125 PTE/K 80

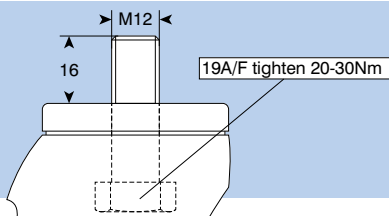

ALTERNATIVE BOLT SIZE

Available on all swivel castors

Add **M12** to castor reference



BUFFER. 90mm diameter thermoplastic rubber with polypropylene centre. Prevents damage to equipment and fabric of building

Fitted height increased by 5mm

Add **-BU** to castor reference



STAINLESS STEEL. All metal components including swivel head and wheel bearings

Available on all 100, 125 diameter castors

Add **-IX** to castor reference



NON-MAGNETIC

Available on all 100, 125 diameter castors

Add **-NM H** to castor reference

i All dimensions are in **mm** and all loadings are in **kg** unless otherwise stated