


- Top plate fixing
- Kingpinless swivel head design

GT
GTF

GT + POLYURETHANE TYRED WHEEL WITH CAST IRON CENTRE

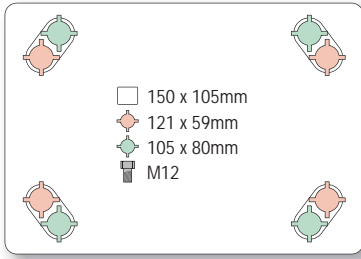

wheel diameter	tread width	fitted height	swivel offset	load capacity	bearing type	Configuration			
						swivel	fixed	swivel + wheel brake	swivel + 2 way directional lock
150	45	200	73	725	ball	GT 6 SUBJ	GTF 6 SUBJ	GT 6 SUBJ BR	GT 6 SUBJ L
200	51	250	85	1045	ball	GT 8 SUBJ	GTF 8 SUBJ	GT 8 SUBJ BR	GT 8 SUBJ L

NOTE: All dimensions are in mm and all loadings in kg unless otherwise stated