


- Socket mounting
- 150, 200mm supplied complete with rubber swivel head seal

SS + Polyurethane tyred wheel with nylon centre

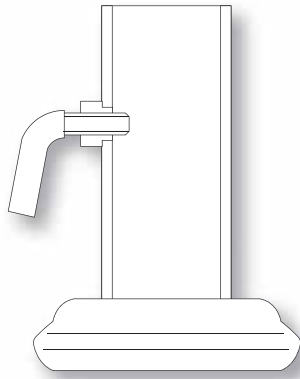

wheel diameter	tread width	fitted height	swivel offset	SWL static	bearing type	to suit tube o.d.	swivel	swivel + thumb screw wheel brake	swivel + total stop brake
125	35	159	41	225	plain	35		SS4 125 NT04 SC6	SS4 125 NT04 SC6 L
	35	159	41	225	plain	44.5		SS4 125 NT04 SC1	SS4 125 NT04 SC1 L
150	45	200	54	820	plain	43		SS5 150 NT0E SC3	SS5 150 NT0E SC3 L
	45	200	54	820	plain	47		SS5 150 NT0E SC7	SS5 150 NT0E SC7 L
	45	200	54	820	plain	50.8		SS5 150 NT0E SC2	SS5 150 NT0E SC2 L
200	50	244	54	820	plain	43		SS5 200 NT0E SC3	SS5 200 NT0E SC3 L
	50	244	54	820	plain	47		SS5 200 NT0E SC7	SS5 200 NT0E SC7 L
	50	244	54	820	plain	50.8		SS5 200 NT0E SC2	SS5 200 NT0E SC2 L

NOTE: All dimensions are in mm and all loadings in kg unless otherwise stated