
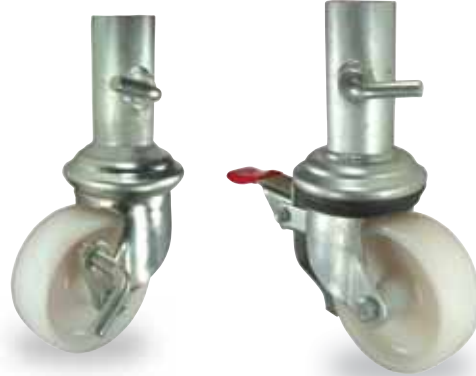


- Socket mounting
- 150, 200mm supplied complete with rubber swivel head seal

SCAFFOLDING SS

SS + Nylon wheel

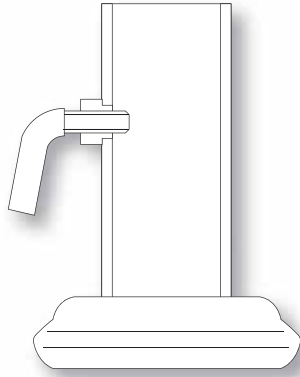

wheel diameter	tread width	fitted height	swivel offset	SWL static	bearing type	to suit tube o.d.	swivel	swivel + thumb screw wheel brake	swivel + total stop brake
100	35	134	41	225	plain	35		SS4 100 NY04 SC6	SS4 100 NY04 SC6 L
	35	134	41	225	plain	44.5		SS4 100 NY04 SC1	SS4 100 NY04 SC1 L
125	35	159	41	225	plain	35		SS4 125 NY04 SC6	SS4 125 NY04 SC6 L
	35	159	41	225	plain	44.5		SS4 125 NY04 SC1	SS4 125 NY04 SC1 L
150	45	200	54	820	plain	43		SS5 150 NY05 SC3	SS5 150 NY05 SC3 L
	45	200	54	820	plain	47		SS5 150 NY05 SC7	SS5 150 NY05 SC7 L
	45	200	54	820	plain	50.8		SS5 150 NY05 SC2	SS5 150 NY05 SC2 L
200	50	244	54	820	plain	43		SS5 200 NY05 SC3	SS5 200 NY05 SC3 L
	50	244	54	820	plain	47		SS5 200 NY05 SC7	SS5 200 NY05 SC7 L
	50	244	54	820	plain	50.8		SS5 200 NY05 SC2	SS5 200 NY05 SC2 L

NOTE: All dimensions are in mm and all loadings in kg unless otherwise stated