




- Provide a ready means of steadying a truck without raising it
- Complete freedom of movement restored by quick release foot pedal
- Moderate operating force required to press rubber pad into contact with the ground does not alter with load




IMPORTANT: TLCH truck locks should be mounted with the top face of the fixing plate exactly 200mm above the floor surface



overall height free position	overall height pad extended	reference
163.5	208	TLCH

Mount truck locks as near as possible to swivel castors, without encroaching on swivel radius

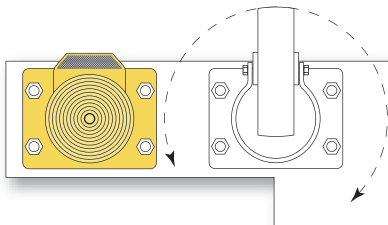

Trucks with 4 swivel castors:
 Mount 1 truck lock each end
Trucks with 2 swivel, 2 fixed castors:
 Mount 1 truck lock beside each swivel castor as a minimum requirement

NOTE: All dimensions are in mm and all loadings in kg unless otherwise stated