




- Provide a ready means of steadying a truck without raising it
- Complete freedom of movement restored by quick release foot pedal
- Moderate operating force required to press rubber pad into contact with the ground does not alter with load




IMPORTANT: Top fixing holes should be no more than 353mm, and bottom fixing holes no less than 226mm above floor surface. Pad should be 33mm above floor surface when raised

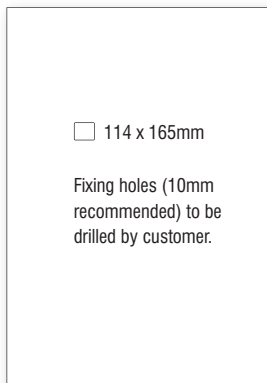

overall height free position	overall height pad extended	pedal	
		left hand	right hand
346	381	TLCM L	TLCM R

Mount truck locks as near as possible to swivel castors, without encroaching on swivel radius. Select left or right hand lever to protect against accidental damage

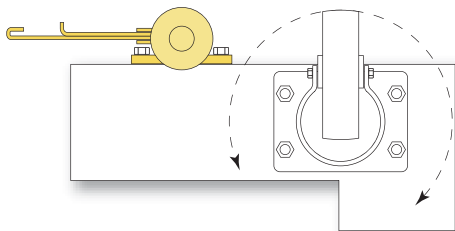

Trucks with 4 swivel castors:
Mount 1 truck lock each end
Trucks with 2 swivel, 2 fixed castors:
Mount 1 truck lock beside each swivel castor as a minimum requirement

NOTE: All dimensions are in mm and all loadings in kg unless otherwise stated