


- Top plate fixing
- Kingpinless swivel head design

TSH
TFH

continued on next page

TSH + HIGH ABRASION RESISTANT RUBBER TYRED WHEEL WITH ALUMINIUM CENTRE

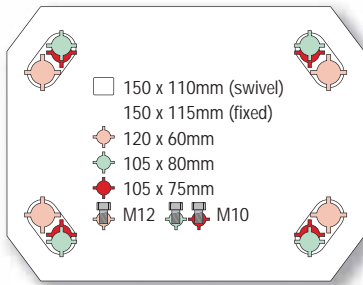

wheel diameter	tread width	fitted height	swivel offset	load capacity	bearing type	swivel + total stop brake		
						swivel	fixed	swivel + total stop brake
125	42	177	55.5	200	ball	TSH 125 GR2H	TFH 125 GR2H	TSH 125 GR2H F
150	42	202	59	300	ball	TSH 150 GR2H	TFH 150 GR2H	TSH 150 GR2H F
200	42	252	66	400	ball	TSH 200 GR2H	TFH 200 GR2H	TSH 200 GR2H F
250	42	303	82	500	ball	TSH 250 GR2H	TFH 250 GR2H	TSH 250 GR2H F



4-WAY DIRECTIONAL LOCK for straight line travel.
To suit all swivel castors except with total stop brake.
Supplied separately. Order ref **TSHDLKIT**



FOOTGUARD.
To suit all swivel castors except with total stop brake. Ground clearance of 20mm.
Supplied fitted. Add **FG** to castor reference

NOTE: All dimensions are in mm and all loadings in kg unless otherwise stated