


# TSH

## TFH


continued on next page



- Top plate fixing
- Kingpinless swivel head design



### TSH + NYLON WHEEL

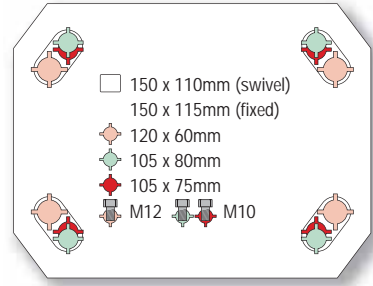

wheel diameter	tread width	fitted height	swivel offset	load capacity	bearing type	swivel	fixed	swivel + total stop brake
150	50	202	59	800	ball	TSH 150 NY2H	TFH 150 NY2H	TSH 150 NY2H F
200	50	252	66	1500	ball	TSH 200 NY2H	TFH 200 NY2H	TSH 200 NY2H F
250	60	303	82	1500	ball	TSH 250 NY2H	TFH 250 NY2H	TSH 250 NY2H F



**4-WAY DIRECTIONAL LOCK** for straight line travel.

To suit all swivel castors except with total stop brake.

Supplied separately. Order ref **TSHDLKIT**



**FOOTGUARD.**

To suit all swivel castors except with total stop brake. Ground clearance of 20mm.

Supplied fitted. Add **FG** to castor reference

NOTE: All dimensions are in mm and all loadings in kg unless otherwise stated