


- Top plate fixing
- Kingpinless swivel head design



**TSH + POLYURETHANE TYRED WHEEL WITH CAST IRON CENTRE**

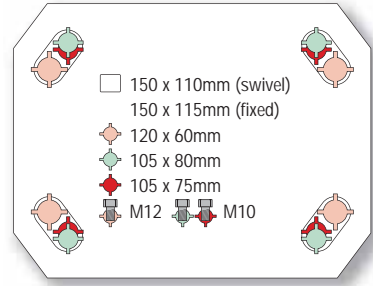

wheel diameter	tread width	fitted height	swivel offset	load capacity	bearing type	swivel + total stop brake		
						swivel	fixed	swivel + total stop brake
100	38	152	52	340	ball	TSH 100 PT2H	TFH 100 PT2H	
125	38	177	55.5	425	ball	TSH 125 PT2H	TFH 125 PT2H	TSH 125 PT2H F
150	38	202	59	730	ball	TSH 150 PT2H	TFH 150 PT2H	TSH 150 PT2H F
200	45	252	66	1100	ball	TSH 200 PT2H	TFH 200 PT2H	TSH 200 PT2H F
250	45	303	82	1200	ball	TSH 250 PT2H	TFH 250 PT2H	TSH 250 PT2H F
300	45	353	95	1400	ball	TSH 300 PT2H	TFH 300 PT2H	TSH 300 PT2H F



**4-WAY DIRECTIONAL LOCK** for straight line travel.  
To suit all swivel castors except with total stop brake.  
Supplied separately. Order ref **TSHDLKIT**



**FOOTGUARD.**  
To suit all swivel castors 125mm and above except with total stop brake. Ground clearance of 20mm.  
Supplied fitted. Add FG to castor reference

NOTE: All dimensions are in mm and all loadings in kg unless otherwise stated