


- Top plate fixing
- Double ball race swivel head
- Kingpinless swivel head design


**TSY**  
TFY



TSY (swivel)

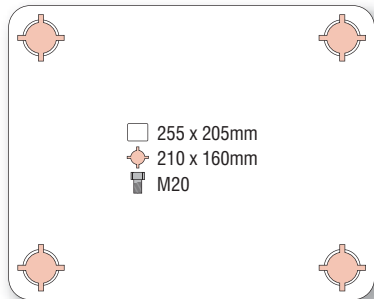

TFY (fixed)

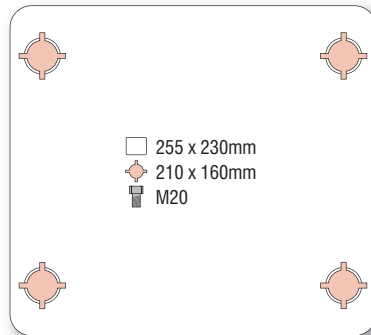

**TSY + CAST NYLON WHEEL (not illustrated)**

| wheel diameter | tread width | fitted height | swivel offset | load capacity | bearing type | swivel          | fixed           | swivel + 4 way directional lock |
|----------------|-------------|---------------|---------------|---------------|--------------|-----------------|-----------------|---------------------------------|
| 400            | 125         | 550           | 120           | 7500          | taper roller | TSY 400 CN3 125 | TFY 400 CN3 125 | TSY 400 CN3 125 D               |

**TSY + POLYURETHANE TYRED WHEEL WITH CAST IRON CENTRE**

| wheel diameter | tread width | fitted height | swivel offset | load capacity | bearing type | swivel       | fixed        | swivel + 4 way directional lock |
|----------------|-------------|---------------|---------------|---------------|--------------|--------------|--------------|---------------------------------|
| 400            | 125         | 550           | 120           | 6700          | taper roller | TSY 400 PT3Z | TFY 400 PT3Z | TSY 400 PT3Z D                  |

NOTE: All dimensions are in mm and all loadings in kg unless otherwise stated