
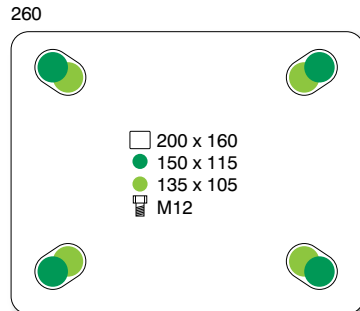


## V90A | PP | PLATE FIXING

PNEUMATIC RUBBER TYRED WHEEL WITH POLYPROPYLENE CENTRE

**i** 260 diameter castor illustrated, 200 diameter castor is fitted with a black centred wheel with ribbed tread (see below)

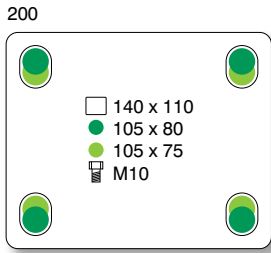

	wheel diameter	tread width	fitted height	swivel offset	load capacity	bearing type	swivel	fixed	swivel + total-stop brake
<b>P</b>	200	50	235	55	75	roller	V90A 200 PPR P05	V91A 200 PPR P05	V92A 200 PPR P05
<b>P</b>	260	85	307	85	150	roller	V90A 260 PPR P07	V91A 260 PPR P07	V92A 260 PPR P07

## PP

PNEUMATIC RUBBER TYRED WHEEL WITH POLYPROPYLENE CENTRE

**i** 200 diameter wheels have black centre and ribbed tread  
260 diameter wheels have red centre and patterned tread



	wheel diameter	tread width	hub width	bore diameter	load capacity	plain bore	roller bearing	ball bearing
<b>P</b>	200	50	60	20	75		A 200 PPR 20	
<b>P</b>	260	85	75	20	150		A 260 PPR 20	



### PUNCTURE-PROOF WHEEL

V90A series 260mm castors are available fitted with a puncture-wheel which has a closed cell microcellular polyurethane tyre and polypropylene

Please ask for details

**P** Preferred range product, see page 1 for details

**i** All dimensions are in **mm** and all loadings are in **kg** unless otherwise stated