


V90A | SP | PLATE FIXING

PNEUMATIC RUBBER TYRED WHEEL WITH PRESSED STEEL CENTRE

i 260 diameter castor illustrated, 200 diameter castor has wheel with ribbed tread (see below)

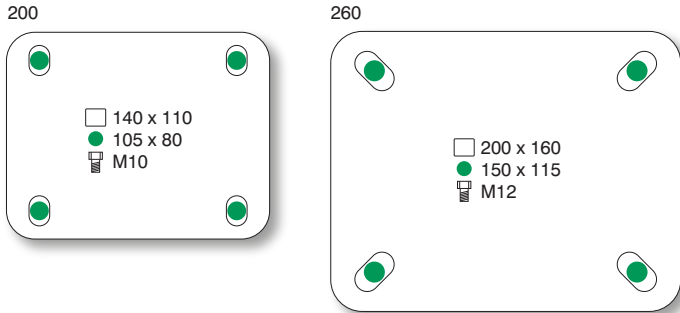

wheel diameter	tread width	fitted height	swivel offset	load capacity	bearing type	swivel	fixed	swivel + total-stop brake
200	50	235	55	75	roller	V90A 200 SPR P05	V91A 200 SPR P05	V92A 200 SPR P05
260	85	307	85	150	roller	V90A 260 SPR P07	V91A 260 SPR P07	V92A 260 SPR P07

SP

PNEUMATIC RUBBER TYRED WHEEL WITH PRESSED STEEL CENTRE

i 200 diameter wheels have ribbed tread
260 diameter wheels have patterned tread



wheel diameter	tread width	hub width	bore diameter	load capacity	plain bore	roller bearing	ball bearing
200	50	60	20	75		A 200 SPR 20	
260	85	88	20	150		A 260 SPR 20	



PUNCTURE-PROOF WHEEL

V90A series 260mm castors are available fitted with a puncture-wheel which has a closed cell microcellular polyurethane tyre and polypropylene

Please ask for details

i All dimensions are in **mm** and all loadings are in **kg** unless otherwise stated