
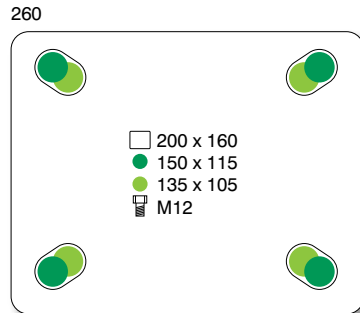


V90A | SP | PLATE FIXING

PNEUMATIC RUBBER TYRED WHEEL WITH PRESSED STEEL CENTRE

i 260 diameter castor illustrated, 200 diameter castor has wheel with ribbed tread (see below)



	wheel diameter	tread width	fitted height	swivel offset	load capacity	bearing type	swivel	fixed	swivel + total-stop brake
P	200	50	235	55	75	roller	V90A 200 SPR P05	V91A 200 SPR P05	V92A 200 SPR P05
P	260	85	307	85	150	roller	V90A 260 SPR P07	V91A 260 SPR P07	V92A 260 SPR P07

SP

PNEUMATIC RUBBER TYRED WHEEL WITH PRESSED STEEL CENTRE

i 200 diameter wheels have ribbed tread
260 diameter wheels have patterned tread



	wheel diameter	tread width	hub width	bore diameter	load capacity	plain bore	roller bearing	ball bearing
P	200	50	60	20	75		A 200 SPR 20	
P	260	85	88	20	150		A 260 SPR 20	



PUNCTURE-PROOF WHEEL

V90A series 260mm castors are available fitted with a puncture-wheel which has a closed cell microcellular polyurethane tyre and polypropylene

Please ask for details

P Preferred range product, see page 1 for details

i All dimensions are in **mm** and all loadings are in **kg** unless otherwise stated