


VSH | AR | PLATE FIXING


BLACK RUBBER TYRED WHEEL WITH ALUMINIUM CENTRE

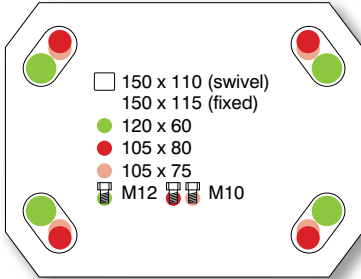

	wheel diameter	tread width	fitted height	swivel offset	load capacity	bearing type	swivel	fixed	swivel + total-stop brake
P	100	40	152	34	160	ball	VSH 100 ARJ P06	VFH 100 ARJ P06	VSH 100 ARJ P06 SWB
P	125	50	177	45	200	ball	VSH 125 ARJ P06	VFH 125 ARJ P06	VSH 125 ARJ P06 SWB
P	150	50	202	49	300	ball	VSH 150 ARJ P06	VFH 150 ARJ P06	VSH 150 ARJ P06 SWB
P	200	50	252	54	400	ball	VSH 200 ARJ P06	VFH 200 ARJ P06	VSH 200 ARJ P06 SWB
P	250	50	303	70	550	ball	VSH 250 ARJ P06	VFH 250 ARJ P06	VSH 250 ARJ P06 SWB

VSH | AP | PLATE FIXING

POLYURETHANE TYRED WHEEL WITH ALUMINIUM CENTRE

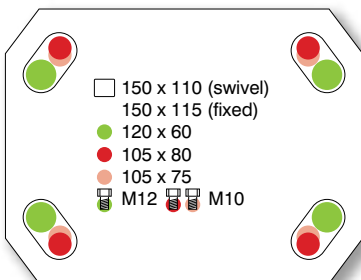

	wheel diameter	tread width	fitted height	swivel offset	load capacity	bearing type	swivel	fixed	swivel + total-stop brake
P	100	50	152	34	350	ball	VSH 100 APJ P06	VFH 100 APJ P06	VSH 100 APJ P06 SWB
P	125	50	177	45	400	ball	VSH 125 APJ P06	VFH 125 APJ P06	VSH 125 APJ P06 SWB
P	150	50	202	49	550	ball	VSH 150 APJ P06	VFH 150 APJ P06	VSH 150 APJ P06 SWB
P	200	50	252	54	800	ball	VSH 200 APJ P06	VFH 200 APJ P06	VSH 200 APJ P06 SWB



4-WAY DIRECTIONAL LOCK for straight line travel

To suit all swivel castors except with total-stop brake

Supplied separately, order ref **VSHDLKIT**

P Preferred range product, see page 1 for details

i All dimensions are in **mm** and all loadings are in **kg** unless otherwise stated