


## VSH | EAP | PLATE FIXING


'ERGONOMIC' CROWN TREAD POLYURETHANE TYRED WHEEL WITH ALUMINIUM CENTRE

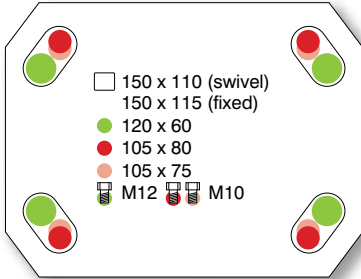

	wheel diameter	tread width	fitted height	swivel offset	load capacity	bearing type	swivel	fixed	swivel + total-stop brake
<b>P</b>	100	50	152	34	300	ball	VSH 100 EAPJ P06	VFH 100 EAPJ P06	VSH 100 EAPJ P06 SWB
<b>P</b>	125	50	177	45	350	ball	VSH 125 EAPJ P06	VFH 125 EAPJ P06	VSH 125 EAPJ P06 SWB
<b>P</b>	150	50	202	49	450	ball	VSH 150 EAPJ P06	VFH 150 EAPJ P06	VSH 150 EAPJ P06 SWB
<b>P</b>	200	50	252	54	520	ball	VSH 200 EAPJ P06	VFH 200 EAPJ P06	VSH 200 EAPJ P06 SWB

## VSH | PT | PLATE FIXING

POLYURETHANE TYRED WHEEL WITH CAST IRON CENTRE

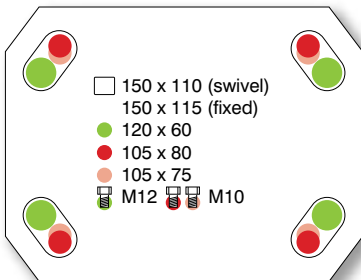

	wheel diameter	tread width	fitted height	swivel offset	load capacity	bearing type	swivel	fixed	swivel + total-stop brake
<b>P</b>	100	50	152	34	350	ball	VSH 100 PTJ P06	VFH 100 PTJ P06	VSH 100 PTJ P06 SWB
<b>P</b>	125	50	177	45	450	ball	VSH 125 PTJ P06	VFH 125 PTJ P06	VSH 125 PTJ P06 SWB
<b>P</b>	150	50	202	49	800	ball	VSH 150 PTJ P06	VFH 150 PTJ P06	VSH 150 PTJ P06 SWB
<b>P</b>	200	50	252	54	1000	ball	VSH 200 PTJ P06	VFH 200 PTJ P06	VSH 200 PTJ P06 SWB
<b>P</b>	250	50	303	70	1300	ball	VSH 250 PTJ P06	VFH 250 PTJ P06	VSH 250 PTJ P06 SWB



4-WAY DIRECTIONAL LOCK for straight line travel

To suit all swivel castors except with total-stop brake

Supplied separately, order ref **VSHDLKIT**

**P** Preferred range product, see page 1 for details

**i** All dimensions are in **mm** and all loadings are in **kg** unless otherwise stated