


## VSH | NY | PLATE FIXING


### NYLON WHEEL

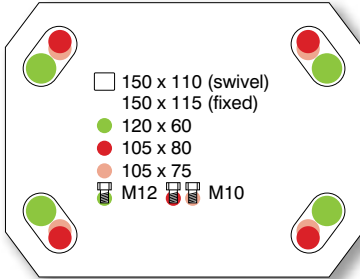

	wheel diameter	tread width	fitted height	swivel offset	load capacity	bearing type	swivel	fixed	swivel + total-stop brake
<b>P</b>	100	40	152	34	300	ball	VSH 100 NYJHD P06	VFH 100 NYJHD P06	VSH 100 NYJHD P06 SWB
<b>P</b>	125	45	177	45	400	ball	VSH 125 NYJHD P06	VFH 125 NYJHD P06	VSH 125 NYJHD P06 SWB
<b>P</b>	150	50	202	49	800	ball	VSH 150 NYJHD P06	VFH 150 NYJHD P06	VSH 150 NYJHD P06 SWB
<b>P</b>	200	50	252	54	1500	ball	VSH 200 NYJHD P06	VFH 200 NYJHD P06	VSH 200 NYJHD P06 SWB
<b>P</b>	250	50	303	70	1500	ball	VSH 250 NYJHD P06	VFH 250 NYJHD P06	VSH 250 NYJHD P06 SWB

## VSH | NP | PLATE FIXING

### GREY POLYURETHANE TYRED WHEEL WITH NYLON CENTRE

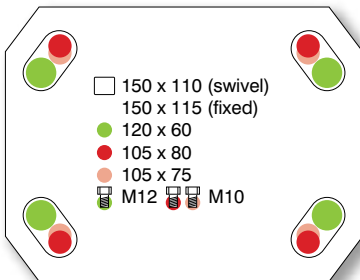

	wheel diameter	tread width	fitted height	swivel offset	load capacity	bearing type	swivel	fixed	swivel + total-stop brake
<b>P</b>	100	40	152	34	300	ball	VSH 100 NPJ P06	VFH 100 NPJ P06	VSH 100 NPJ P06 SWB
<b>P</b>	125	45	177	45	400	ball	VSH 125 NPJ P06	VFH 125 NPJ P06	VSH 125 NPJ P06 SWB
<b>P</b>	150	50	202	49	500	ball	VSH 150 NPJ P06	VFH 150 NPJ P06	VSH 150 NPJ P06 SWB
<b>P</b>	200	57	252	54	800	ball	VSH 200 NPJ P06	VFH 200 NPJ P06	VSH 200 NPJ P06 SWB



4-WAY DIRECTIONAL LOCK for straight line travel

To suit all swivel castors except with total-stop brake

Supplied separately, order ref **VSHDLKIT**

**P** Preferred range product, see page 1 for details

**i** All dimensions are in **mm** and all loadings are in **kg** unless otherwise stated