


- Centre: Cast iron.
- Tyre: N/app.
- Finish: Black.

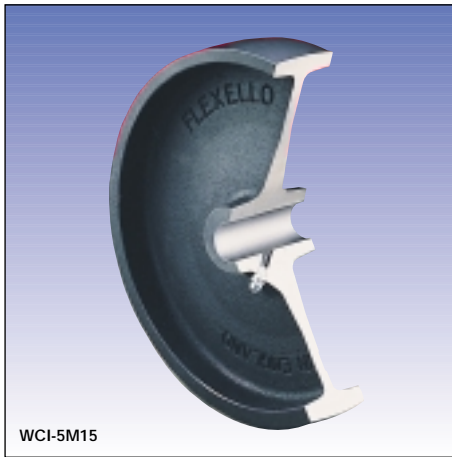

whl dia	tread width	load cap	bore dia	hub width	plain bore	roller bearing	ball bearing	used in castor series
					ref	ref	ref	
50	22	61	6.4	27	WCI-20 *			61/88
63	25	122	9.5	33	WCI-25 *			61/88
75	32	170	12	40	WCI-3M12			61/88
100	38	450	15	48	WCI-4M15	WCI-4RBM15		61/88, SL/SLF
125	41	630	15	48	WCI-5M15	WCI-5RBM15		61/88, SL/SLF
150	45	1180	20	60	WCI-6M20	WCI-6RBM20 **		61/88, 55/88, SL/SLF, GT/GTF, KV/KVF, JA
	45	1180	25.4	60	WCI-6L			
200	45	1270	20	60	WCI-8M20	WCI-8RBM20 **		55/88, SL/SLF, GT/GTF, KV/KVF, JA
	45	1270	25	60		WCI-8RBM25		
	45	1270	25.4	60	WCI-8L	WCI-8LRB		
250	51	1360	25	60		WCI-10RBM25		GT/GTF, KV/KVF
	51	1360	25.4	60		WCI-10RB		

* = mazak (a zinc based alloy, finish: silver)

** = available with high temperature bearing for use up to 200°c. To order add suffix 'HT' to wheel code