
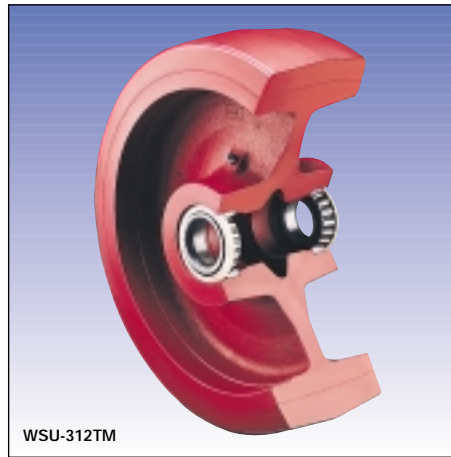


- Centre: Cast iron.
- Tyre: Polyurethane.
- Finish: Deep red.

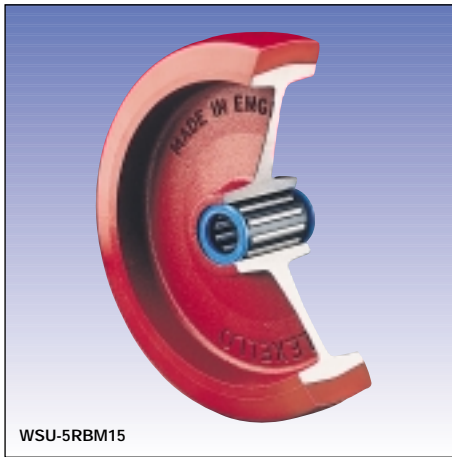

whl dia	tread width	load cap	bore dia	hub width	plain bore	roller bearing	ball bearing	taper roller bearing	used in castor series	
					ref	ref	ref	ref		
75	29	150	12	39	WSU-3M12				61/88	
100	43	295	15	48		WSU-4RBM15			61/88, SL/SLF	
	35	325	15	48		WSU-5RBM15			61/88, SL/SLF	
125	35	325	25	50		WSU-5RBM25				
	35	325	25.4	50		WSU-5LRB				
	38	600	20	60		WSU-61RBM20			61/88, 22/29, SL/SLF	
	45	725	20	60		WSU-6RBM20			55/88, GT/GTF, KV/KVF, JA	
	45	725	25	60		WSU-6RBM25				
150	45	725	25.4	60		WSU-6LRB				
	45	725	12	61			WSU-6BJM12		22/29, 55/88, SL/SLF, GT/GTF, KV/KVF	
	45	725	20	57			WSU-6BJM20			
	45	725	25	57			WSU-6BJM25			
	45	725	12.7	62				WSU-6TM*	KV/KVF	
	200	51	1045	20	60		WSU-8RBM20			22/29, 55/88, SL/SLF, GT/GTF, KV/KVF, JA
		51	1045	25	60		WSU-8RBM25			
		51	1045	25.4	60		WSU-8LRB			
51		1045	12	61			WSU-8BJM12		22/29, 55/88, SL/SLF, GT/GTF, KV/KVF	
51		1045	20	57			WSU-8BJM20			
51		1045	25	57			WSU-8BJM25			
51		1045	12.7	62				WSU-8TM*	KV/KVF	
76		1270	25	92			WSU-83BJM25			
250	76	1270	12.7	106				WSU-83TM*	KV/KVF	
	76	1270	19.1	92				WSU-108TM	EH/EHF	
	51	1135	25	60		WSU-10RBM25			GT/GTF, KV/KVF	
	51	1135	25.4	60		WSU-10RB				
	51	1135	31.8	60		WSU-10LRB				
	51	1135	12	61			WSU-10BJM12		GT/GTF, KV/KVF	
	51	1135	25	57			WSU-10BJM25			
	51	1135	12.7	62				WSU-10TM*	KV/KVF	
	76	2270	12.7	106				WSU-103TM*	KV/KVF	
	76	2270	19.1	92				WSU-110TM	EH/EHF	
300	76	2950	31.8	92				WSU-210TM	EH/EHF, ISO, JA	
	76	2950	38.1	95			WSU-210RB			
	57	1270	25	60		WSU-12RBM25			KV/KVF	
	57	1270	25.4	60		WSU-12RB				
	57	1270	31.8	60		WSU-12LRB				
	57	1270	12	61			WSU-12BJM12		KV/KVF	
	57	1270	25	57			WSU-12BJM25			
	57	1270	12.7	62				WSU-12TM*	KV/KVF	
400	76	2950	31.8	92				WSU-212TM	EH/EHF	
	76	2950	38.1	95		WSU-212RB				
	102	4080	31.8	118				WSU-312TM	EH/EHF, ISO	
	127	6120	34.9	143				WSU-516TM	EH/EHF	

\* = width and bore size of integral reducing bush to enable use in castor