
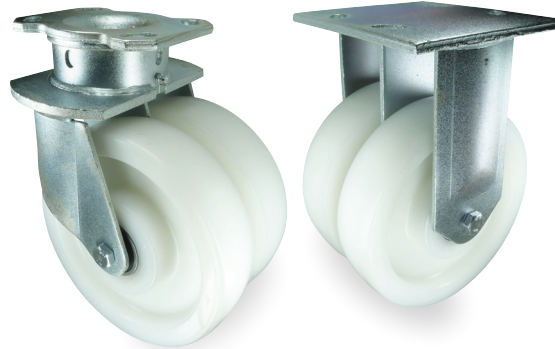


## 2VSH | NY | PLATE FIXING


### NYLON WHEELS

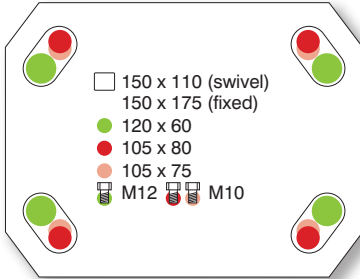


	wheel diameter	tread width	fitted height	swivel offset	load capacity	bearing type	swivel	fixed	swivel + brake
<b>P</b>	100	50 x 2	166	42	900	ball	2VSH 100 NYJHD P06	2VFH 100 NYJHD P06	
<b>P</b>	125	50 x 2	192	45	1000	ball	2VSH 125 NYJHD P06	2VFH 125 NYJHD P06	
<b>P</b>	150	50 x 2	217	49	1200	ball	2VSH 150 NYJHD P06	2VFH 150 NYJHD P06	
<b>P</b>	200	50 x 2	267	54	1500	ball	2VSH 200 NYJHD P06	2VFH 200 NYJHD P06	
<b>P</b>	250	50 x 2	318	70	1500	ball	2VSH 250 NYJHD P06	2VFH 250 NYJHD P06	

## 2VSH | NP | PLATE FIXING

### GREY POLYURETHANE TYRED WHEELS WITH NYLON CENTRE

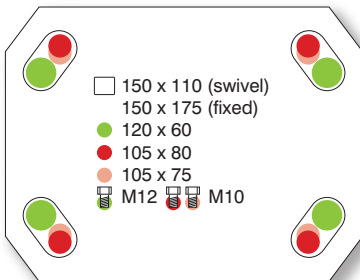

	wheel diameter	tread width	fitted height	swivel offset	load capacity	bearing type	swivel	fixed	swivel + brake
<b>P</b>	100	40 x 2	166	42	450	ball	2VSH 100 NPJ P06	2VFH 100 NPJ P06	
<b>P</b>	125	45 x 2	192	45	550	ball	2VSH 125 NPJ P06	2VFH 125 NPJ P06	
<b>P</b>	150	50 x 2	217	49	650	ball	2VSH 150 NPJ P06	2VFH 150 NPJ P06	
<b>P</b>	200	57 x 2	267	54	1050	ball	2VSH 200 NPJ P06	2VFH 200 NPJ P06	

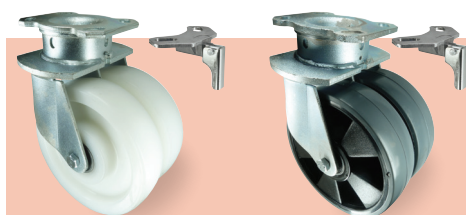

4-WAY DIRECTIONAL LOCK for straight line travel

Supplied separately, order ref VSHDLKIT

**P** Preferred range product, see page 1 for details

**i** All dimensions are in **mm** and all loadings are in **kg** unless otherwise stated