


## V50Q | AR | PLATE FIXING



BLACK RUBBER TYRED WHEEL WITH ALUMINIUM CENTRE



	wheel diameter	tread width	fitted height	swivel offset	load capacity	bearing type	swivel	fixed	swivel + total-stop brake
<b>P</b>	100	35	150.5	53	160	ball	V50Q 100 ARJ P05	V51Q 100 ARJ P05	V52Q 100 ARJ P05
<b>P</b>	125	48	178	53	200	ball	V50Q 125 ARJ P05	V51Q 125 ARJ P05	V52Q 125 ARJ P05
<b>P</b>	160	42	205	53	300	ball	V50Q 160 ARJ P05	V51Q 160 ARJ P05	V52Q 160 ARJ P05
<b>P</b>	200	37	245	53	400	ball	V50Q 200 ARJ P05	V51Q 200 ARJ P05	V52Q 200 ARJ P05
<b>P</b>	250	40	294	53	550	ball	V50Q 250 ARJ P05	V51Q 250 ARJ P05	V52Q 250 ARJ P05

## V50Q | AP | PLATE FIXING

POLYURETHANE TYRED WHEEL WITH ALUMINIUM CENTRE

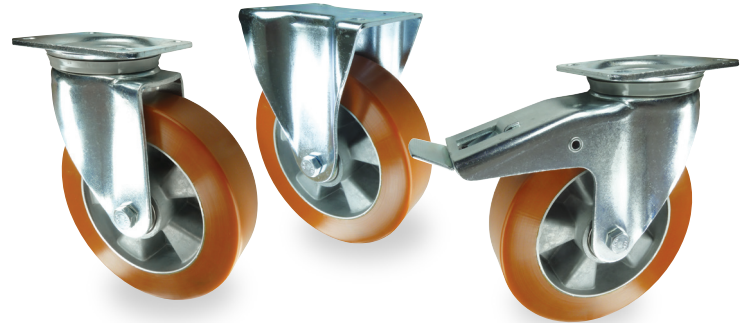

	wheel diameter	tread width	fitted height	swivel offset	load capacity	bearing type	swivel	fixed	swivel + total-stop brake
<b>P</b>	100	50	150.5	53	350	ball	V50Q 100 APJ P05	V51Q 100 APJ P05	V52Q 100 APJ P05
<b>P</b>	125	50	178	53	450	ball	V50Q 125 APJ P05	V51Q 125 APJ P05	V52Q 125 APJ P05
<b>P</b>	160	50	205	53	550	ball	V50Q 160 APJ P05	V51Q 160 APJ P05	V52Q 160 APJ P05
<b>P</b>	200	50	245	53	800	ball	V50Q 200 APJ P05	V51Q 200 APJ P05	V52Q 200 APJ P05

**P** Preferred range product, see page 1 for details

**i** All dimensions are in **mm** and all loadings are in **kg** unless otherwise stated