



i VTLCH truck locks should be mounted with the top face of the top plate exactly 200mm above the floor surface



overall height free	overall height extended
163.5	208

reference

VTLCH

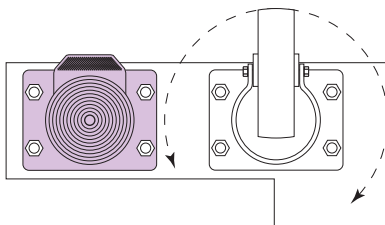

i Mount truck locks as near as possible to swivel castors, without encroaching on the swivel radius.

Trucks with 4 swivel castors
Mount 1 truck lock at each end

Trucks with 2 swivel, 2 fixed castors
Mount 1 truck lock beside each swivel castor as a minimum requirement

i All dimensions are in **mm** and all loadings are in **kg** unless otherwise stated